


Art. 810s70

Ball valve in stainless steel, full bore type, stem and ball in stainless steel AISI 316, lever, nut, rosette and stop lever in stainless steel AISI 304, RPTFE seat, stem gaskets in PTFE, maximum working pressure 70 barg, maximum working temperature 190 °C., marked CE, BSP or NPT screwed ends.

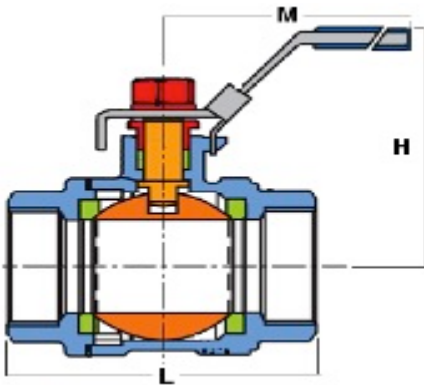

DN	1/4	3/8	1/2	3/4	1"	1 1/4	1 1/2	2"
Ø	12	13	15	20	25	32	38	50
L	45	50	57	64	76	89,5	102	122
H	50	43	50	58	72	74	91	100
M	92	92	92	112	140	160	165	165
Nm	4	4	5	7,5	12	18	22	26
Kg.	0,23	0,25	0,30	0,44	0,76	1,30	1,75	2,75

As a continuous research of product development, patterns are liable to be modified as improvements are introduced. Drawings, pressures and sizes, although accurate at the moment of going to press, should therefore be considered as indicative information only. 01/02